



Job Name:	Catalog Number:	Type:
Distributor:		Prepared by: _____ Date: _____

LED Mini Wall Pack



Ideal solution for industrial, commercial and other wall pack applications

T1-MWPLED

DESCRIPTION

The T1-MWPLED series LED mini wall packs are great solutions for general outdoor lighting. These LED mini wall packs are great for doorways and perimeter lighting. The T1-MWPLED is designed for easy installation and energy saving with an optional photocell.

SPECIFICATION FEATURES

Mounting

Designed for wall mounting

Applications

Ideal exterior applications such as doorways, walkways and perimeter lighting

Construction

Die cast aluminum housing and PC cover

Certification

DLC Standard and ETL listed. All components have UL or ETL certifications.

Protection Grade IP65

Warranty

5-year Limited Warranty

Input Voltage	120V-277V
Rated Wattage	See Performance Data
Delivered Lumens	See Performance Data
Efficacy	See Performance Data
CRI	> 70
Available CCT	4000K, 5000K
Ambient Temp	-20°C to 50°C
Power Factor	> 0.90
THD	< 20%
Dimming	Non-dimming
Controls	Optional photocell

ORDERING OPTIONS [Example shown: T1-MWPLED/A/20-40-PCB]

SERIES	RATED WATTAGE	COLOR TEMP	VOLTAGE	DIMMING	CONTROLS
T1-MWPLED	/A/ 20	- 40			- PCB
	20 - 20W	40 - 4000K 50 - 5000K	[Blank] - 120-277V	[Blank] - 0-10V	PCB - Button-style photocell



T1-MWPLED/A/20



LED Mini Wall Pack

T1-MWPLED/A/20

Catalog number	Rated Wattage	Efficacy	Delivered Lumens
T1-MWPLED/A/20-40	20W	105	2100
T1-MWPLED/A/20-50	20W	107	2140




T1-MWPLED/A/20 - 8.7" x 6.1" x 2.8"

ZONAL LUMENS SUMMARY

Zone	Lumens	% Lamp	% Luminaire
0-30	373.0	18.8	18.8
0-40	613.6	31.0	31.0
0-60	1,199.1	60.5	60.5
60-90	547.1	27.6	27.6
70-100	367.2	18.5	18.5
90-120	186.9	9.4	9.4
0-90	1,746.3	88.2	88.2
90-180	234.6	11.8	11.8
0-180	1,980.9	100	100

LUMENS PER ZONE

Zone	Lumens	%Total	Zone	Lumens	%Total
0-10	42.8	2.2	90-100	83.7	4.2
10-20	131.9	6.7	100-110	62.7	3.2
20-30	198.4	10.0	110-120	40.6	2.0
30-40	240.5	12.1	120-130	24.1	1.2
40-50	285.8	14.4	130-140	13.2	0.7
50-60	299.8	15.1	140-150	6.8	0.3
60-70	263.6	13.3	150-160	2.9	0.1
70-80	175.4	8.9	160-170	0.7	0
80-90	108.1	5.5	170-180	0.1	0

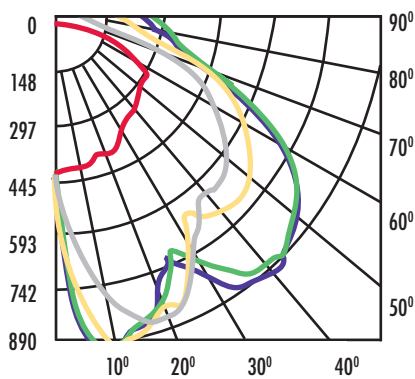

■ 0° H
 ■ 22.5° H
 ■ 45° H
 ■ 67.5° H
 ■ 90° H

FLOOD SUMMARY

	Efficiency %	Lumens	Horiz. Spread	Vert. Spread
Field (10%):	93.4	1,850.3	153.0	153.8
Beam (50%):	61.1	1,210.6	109.5	72.8
Total:	100	1,980.8		

T-1 Lighting, Inc., 9929 Pioneer Boulevard, Santa Fe Springs, CA 90670 626-234-2328

www.t1-lighting.com

sales@t1-lighting.com