



Job Name:	Catalog Number:	Type:
Distributor:		Prepared by: _____ Date: _____



DESCRIPTION

The small size of the T1-SLED makes it ideal choice for size restricted architectural applications. The T1-SLED series can be the illumination in commercial, industrial, retail and residential applications. Fixture can be used in storage/utility areas, coves, display cases, shops, task and general area lighting.

SPECIFICATION FEATURES	
<p><u>Mounting</u> Surface mount or pendant mount with aircraft cable option</p> <p><u>Applications</u> Ideal solution for warehouses, offices, retail, etc.</p> <p><u>Construction</u> Durable post painted steel housing with white gloss finish and optional frosted polycarbonate lenses</p> <p><u>Certification</u> DLC Premium, UL listed. All components have UL certification. Protection Grade IP20</p> <p><u>Warranty</u> 7-year Limited Warranty. See warranty documentation for more information.</p>	<p>Input Voltage 120V-277V</p> <p>Rated Wattage See Performance Data</p> <p>Delivered Lumens See Performance Data</p> <p>Efficacy See Performance Data</p> <p>CRI > 80</p> <p>Available CCT 4000K, 5000K</p> <p>Color Consistency 5-step MacAdam Ellipse</p> <p>Rated Life > 50,000 hours</p> <p>Ambient Temp -20°C to 50°C</p> <p>Power Factor > 0.92</p> <p>THD < 20%</p> <p>Dimming 0-10V</p>

ORDERING OPTIONS [Example shown: T1-SLED424-40-AC-OS]

SERIES	FORM FACTOR	RATED WATTAGE	COLOR TEMP	LENS DIFFUSER	DIMMING	ACCESSORIES	CONTROLS
T1-SLED	4	24	- 40			- AC	- OS
	4 - 4' 8 - 8'	4' 24 - 24W 36 - 36W 8' 48 - 48W 72 - 72W	40 - 4000K 50 - 5000K	[Blank] - Frosted	[Blank] - 0-10V	[Blank] - V-hooks & chains 36" AC - Aircraft cable WG - Wireguard	OS - On/off PIR motion sensor DL - Daylight harvesting sensor SDS - Step dimming PIR motion and day light sensor EM - Emergency battery backup, 90 mins.





LED Strip Light

T1-SLED424

Catalog number	Rated Wattage	Efficacy	Delivered Lumens
T1-SLED424-40	24W	137.9	3263
T1-SLED424-50	24W	138.5	3324




T1-SLED424 - 47.9" x 3.3" x 3.6"

ZONAL LUMENS SUMMARY

Zone	Lumens	% Lamp	% Luminaire
0-30	1,294.3	26.5	26.5
0-40	2,132.0	43.7	43.7
0-60	3,808.9	78.1	78.1
60-90	1,071.0	21.9	21.9
0-90	4,879.8	100	100

LUMENS PER ZONE

Zone	Lumens	%Total
0-10	156.5	3.2
10-20	448.5	9.2
20-30	689.3	14.1
30-40	689.3	17.2
40-50	876.3	18.0
50-60	800.6	16.4
60-70	607.1	12.4
70-80	345.9	7.1
80-90	118.0	2.4

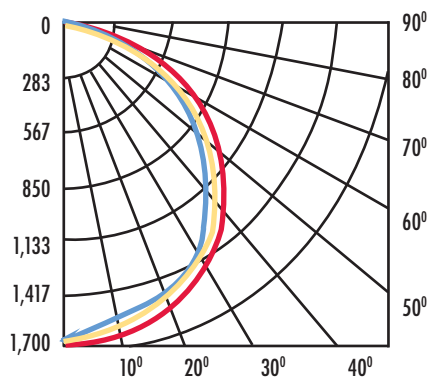

■ 0° H ■ 45° H ■ 90° H

FLOOD SUMMARY

	Efficiency %	Lumens	Horiz. Spread	Vert. Spread
Field (10%):	98.3	4,796.0	159.5	165.8
Beam (50%):	73.8	3,603.7	114.9	114.2
Total:	100	4,878.2		

T-1 Lighting, Inc., 9929 Pioneer Boulevard, Santa Fe Springs, CA 90670 626-234-2328

www.t1-lighting.com

sales@t1-lighting.com



LED Strip Light

T1-SLED436

Catalog number	Rated Wattage	Efficacy	Delivered Lumens
T1-SLED436-40	36W	130.9	4625
T1-SLED436-50	36W	131.7	4741




T1-SLED436 - 47.9" x 3.3" x 3.6"

ZONAL LUMENS SUMMARY

Zone	Lumens	% Lamp	% Luminaire
0-30	1,294.3	26.5	26.5
0-40	2,132.0	43.7	43.7
0-60	3,808.9	78.1	78.1
60-90	1,071.0	21.9	21.9
0-90	4,879.8	100	100

LUMENS PER ZONE

Zone	Lumens	%Total
0-10	156.5	3.2
10-20	448.5	9.2
20-30	689.3	14.1
30-40	689.3	17.2
40-50	876.3	18.0
50-60	800.6	16.4
60-70	607.1	12.4
70-80	345.9	7.1
80-90	118.0	2.4

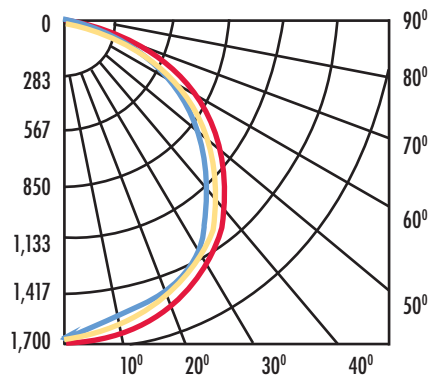

■ 0° H ■ 45° H ■ 90° H

FLOOD SUMMARY

	Efficiency %	Lumens	Horiz. Spread	Vert. Spread
Field (10%):	98.3	4,796.0	159.5	165.8
Beam (50%):	73.8	3,603.7	114.9	114.2
Total:	100	4,878.2		