



Job Name:	Catalog Number:	Type:
Distributor:		Prepared by: _____
		Date: _____



DESCRIPTION

The T1-WALED series provides uniformed bright light distribution and energy savings. These LED wrap around fixtures are optimal solutions for parking garages, workshops, kitchens, offices, hallways and stairways. The T1-WALED series is designed with high efficacy LED engines to get the most energy savings compared to fluorescent fixtures.

SPECIFICATION FEATURES	
<p><u>Mounting</u> Surface mount and suitable for continuous installation</p> <p><u>Applications</u> Ideal solution for parking garages, stairwells, hallways, etc.</p> <p><u>Construction</u> Durable post painted steel housing with white gloss finish and acrylic prismatic lens</p> <p><u>Certification</u> DLC Standard and UL listed. All components have UL certification. Protection Grade IP20</p> <p><u>Warranty</u> 7-year Limited Warranty. See warranty documentation for more information.</p>	<p>Input Voltage 120V-277V</p> <p>Rated Wattage See Performance Data</p> <p>Delivered Lumens See Performance Data</p> <p>Efficacy See Performance Data</p> <p>CRI > 80</p> <p>Available CCT 4000K, 5000K</p> <p>Color Consistency 5-step MacAdam Ellipse</p> <p>Rated Life. > 50,000 hours</p> <p>Ambient Temp -20°C to 50°C</p> <p>Power Factor > 0.92</p> <p>THD < 20%</p> <p>Dimming 0-10V</p>

ORDERING OPTIONS [Example shown: T1-WALED440-40-MS]						
SERIES	FORM FACTOR	RATED WATTAGE	COLOR TEMP	LENS DIFFUSER	DIMMING	CONTROLS
T1-WALED	4	40	- 40			- MS
	4 - 4'	40 - 40W	40 - 4000K 50 - 5000K	[Blank] - Frosted	[Blank] - 0-10V	MS - Step dimming DL - Daylight harvesting sensor EM - Emergency battery backup, 90 mins.



T1-WALED440



LED Wraparounds

T1-WALED440

Catalog number	Rated Wattage	Efficacy	Delivered Lumens
T1-WALED440-40	40W	110	4510
T1-WALED440-50	40W	111	4540



T1-WALED440


48.7" x 6.4" x 2.5"

ZONAL LUMENS SUMMARY

Zone	Lumens	% Lamp	% Luminaire
0-30	1,235.7	28.8	28.2
0-40	1,978.9	46.1	45.2
0-60	3,360.6	78.3	76.7
60-90	1,022.2	23.8	23.3
0-90	4,382.8	102.1	100

LUMENS PER ZONE

Zone	Lumens	%Total
0-10	157.1	3.6
10-20	436.3	10.0
20-30	642.3	14.7
30-40	743.3	17.0
40-50	736.3	16.8
50-60	645.4	14.7
60-70	504.1	11.5
70-80	342.6	7.8
80-90	175.5	4.0

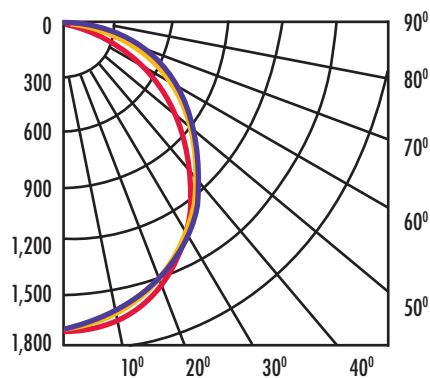

■ 0° H ■ 45° H ■ 90° H

FLOOD SUMMARY

	Efficiency %	Lumens	Horiz. Spread	Vert. Spread
Field (10%):	100	4,292.8	153.8	173.1
Beam (50%):	62.7	2,691.0	94.3	105.1
Total:	102.1	4,378.8		

T-1 Lighting, Inc., 9929 Pioneer Boulevard, Santa Fe Springs, CA 90670 626-234-2328

www.t1-lighting.com

sales@t1-lighting.com